




Sawn

Antline

Bluestone



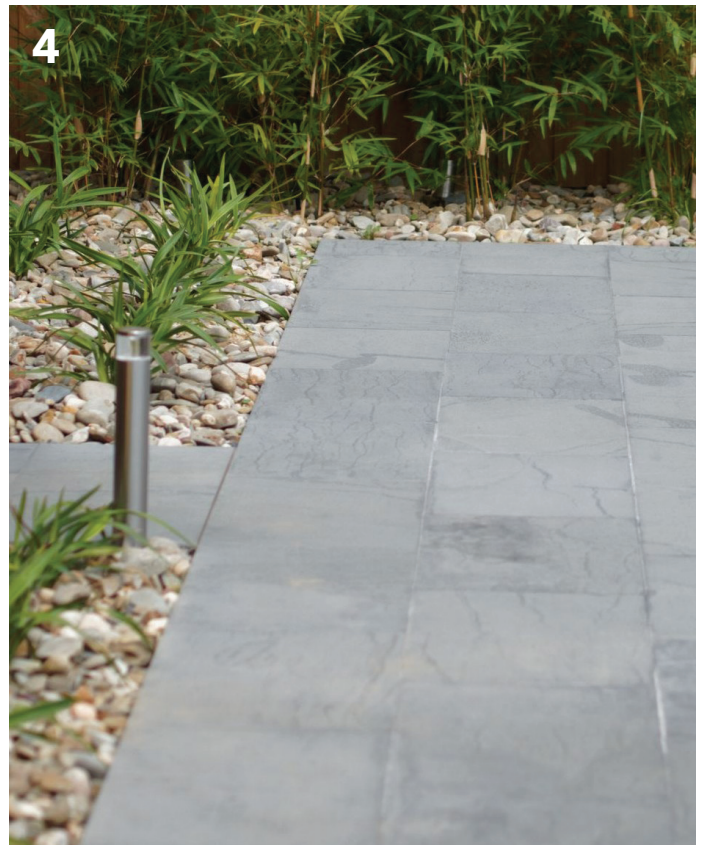

1 Garden Stepping Stone

2 Exterior Wall Cladding

3 Pool Surrounds

4 Outdoor Paving

Finish

Sawn	Honed	Flamed	Sandblasted	Rockface/ Natural Split	Tumbled and Unfilled	Honed and Filled	Acid Wash & Tumbled
P5 <input checked="" type="checkbox"/>	P3 <input checked="" type="checkbox"/>	P5 <input type="checkbox"/>	P5 <input checked="" type="checkbox"/>	P5 <input checked="" type="checkbox"/>	P4 <input type="checkbox"/>	P2 <input type="checkbox"/>	P5 <input type="checkbox"/>

- ☒ Standard Stock
☒ Made to Order
☐ Not Available

Format

- ☒ Paving ☒ Coping ☒ Stepper ☒ Cobble ☒ Slab

Slip Rating

- P1 - Very low slip resistance
P2 - Low slip resistance
P3 - Moderate slip resistance
P4 - Good slip resistance
P5 - Very high slip resistance

Application

- ☒ Exterior Paving and Pathway ☒ Pool Surrounds ☒ Driveway
☒ Light Traffic ☒ Regular Traffic ☒ Commercial Area
☒ Interior Walling ☒ Exterior Walling ☒ Feature Walls

MTO - Made to Order

Sealing Requirement

- ☐ Optional ☒ Recommended ☐ Required

Stone Properties

Slip Resistance	Salt Resistance	Abrasion	Strength	Water Absorption	Comprehensive Strength	Flexural Strength	Light Reflectance Value (LRV)
AS 4586	AS/NZS 4456.10						
P5	Exposure Grade						

Type and Size (mm)

Finish	Paver	Coping	Stepper	Cobbles	Walling	Slab
Sawn	600x400x20 800x400x20 1005x500x20 Antline Pattern x20	600x400x20 drop 50 800x400x20 drop 50 600x400x30 Bevelled Edge	MTO	100x100x30 tumbled	MTO	MTO

Daily Maintenance

- Sweep or use a leaf blower to remove dirt, leaves, and debris, especially in textured areas.
- Rinse with water to wash away dust and surface grime. Rain usually helps, but hosing occasionally maintains appearance.
- Avoid dragging heavy furniture or tools across the surface to prevent chipping on the split edges.
- Use rubber pads under pots, outdoor furniture, or metal items to avoid rust marks or scratches.

Sealing

- Sawn finish bluestone is slightly more porous than honed, and can trap fine dust.
- Seal every 12–18 months with a penetrating sealer that is suitable for natural stone and exterior use.
- A color-enhancing sealer can enrich the natural dark tone and reduce patchiness (optional).

Cleaning

- Clean with a pH-neutral stone cleaner or a mild soap diluted in water.
- Do not use acidic cleaners (vinegar, lemon, harsh grout cleaners), which will etch and damage the surface.
- Low pressure washing is safe.
- For general cleaning, scrub gently with a soft bristle brush to reach into the brushed surface texture. Rinse thoroughly to avoid residue buildup.
- For stubborn stains, use a stone-safe poultice for oil, rust, or organic marks. Consider spot sealing after treating stains.

SAI Stone offers a wide range of cleaning and sealing products, as well as glue and grouting solutions. If you need more information or assistance, don't hesitate to reach out!

Contact Us

5 Hamilton Street
VIC 3166
Australia

1300 855 851
info@saistone.com.au
saistone.com.au

