




Sandblasted

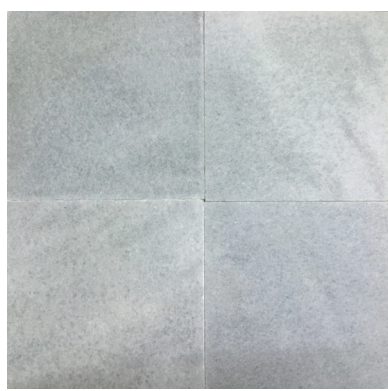


Honed

# *Frozen Blue*

Marble





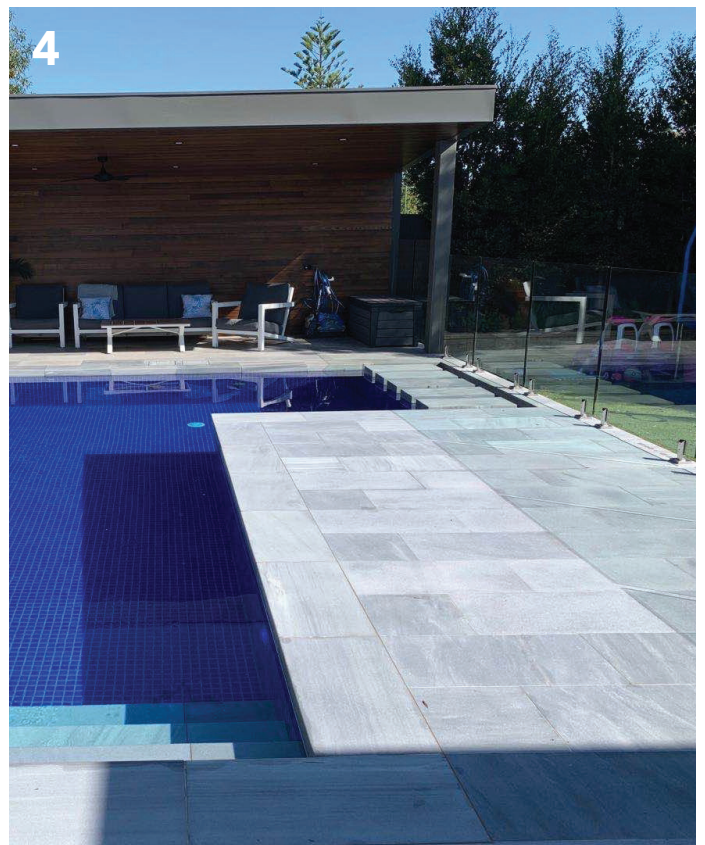

1 Wall Cladding

2 Foot Path (wet looking)

3 Cobbles

4 Pool Paving and Coping

Finish

Sawn	Honed	Flamed	Sandblasted	Rockface/ Natural Split	Tumbled and Unfilled	Honed and Filled	Acid Wash & Tumbled
P5 <input type="checkbox"/>	P3 <input checked="" type="checkbox"/>	P5 <input type="checkbox"/>	P5 <input checked="" type="checkbox"/>	P5 <input type="checkbox"/>	P5 <input type="checkbox"/>	P3 <input type="checkbox"/>	P5 <input type="checkbox"/>

- ☒ Standard Stock
- ☒ Made to Order
- ☐ Not Available

Format

- ☒ Paving
- ☒ Coping
- ☒ Stepper
- ☒ Cobble
- ☒ Slab

**Slip Rating**  
P1 - Very low slip resistance  
P2 - Low slip resistance  
P3 - Moderate slip resistance  
P4 - Good slip resistance  
P5 - Very high slip resistance

Application

- ☒ Exterior Paving and Pathway
- ☒ Pool Surrounds
- ☒ Driveway
- ☒ Light Traffic
- ☒ Regular Traffic
- ☒ Commercial Area
- ☒ Interior Walling
- ☒ Exterior Walling
- ☒ Feature Walls

Sealing Requirement

- ☐ Optional
- ☒ Recommended
- ☐ Required

Stone Properties

Slip Resistance	Salt Resistance	Abrasion	Strength	Water Absorption	Comprehensive Strength	Flexural Strength	Light Reflectance Value (LRV)
AS 4586	AS/NZS 4456.10						
P5	Exposure Grade						

Type and Size (mm)

Finish	Paver	Coping	Stepper	Cobbles	Walling	Slab
Sandblasted	600x400x20 800x400x20	600x400x20 drop 60 800x400x20 drop 60 600x400x30 bevelled 800x400x30 bevelled	Made to order	100x100x20	Made to order	1600x600x30





### Daily Maintenance

- Dust or sweep regularly to prevent dirt and grit from scratching the surface.
- Wipe spills immediately, especially acidic substances (e.g., lemon juice, vinegar, wine, coffee).
- Use a soft cloth or microfiber mop for dry cleaning and dusting.
- Use coasters and mats under glasses, bottles, and hot dishes.

### Sealing

Marble is porous, so sealing is essential to protect from stains.

- Initial sealing should be done during or just after installation.
- Reseal frequency:
  - Every 6–12 months for kitchen countertops or high-traffic areas.
  - Annually or bi-annually for flooring, depending on use and product type.
- Test with water: if water darkens the marble, it's time to reseal.
- Use a penetrating (impregnating) sealer made for natural stone.

### Cleaning

- Use a pH-neutral stone cleaner or a mild dish soap diluted with water.
- Avoid:
  - Acidic or alkaline cleaners (e.g., vinegar, bleach, ammonia).
  - Abrasive pads, scouring powders, or rough cloths.
- For tougher stains:
  - Use a poultice paste specifically designed for marble.
  - Consult a stone care professional for deep etching or staining.
- Dry surfaces after cleaning to prevent water spots.

***SAI Stone offers a wide range of cleaning and sealing products, as well as glue and grouting solutions. If you need more information or assistance, don't hesitate to reach out!***

### Contact Us

5 Hamilton Street  
VIC 3166  
Australia

1300 855 851  
[info@saistone.com.au](mailto:info@saistone.com.au)  
[saistone.com.au](http://saistone.com.au)

