

Sandblasted



Honed


Belgium Blue

Limestone






1

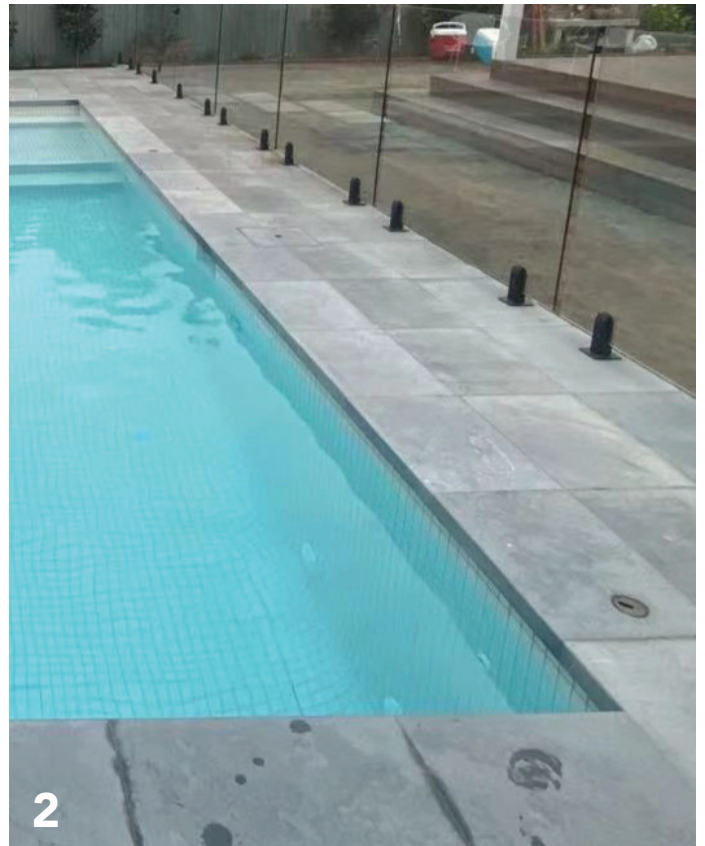

2

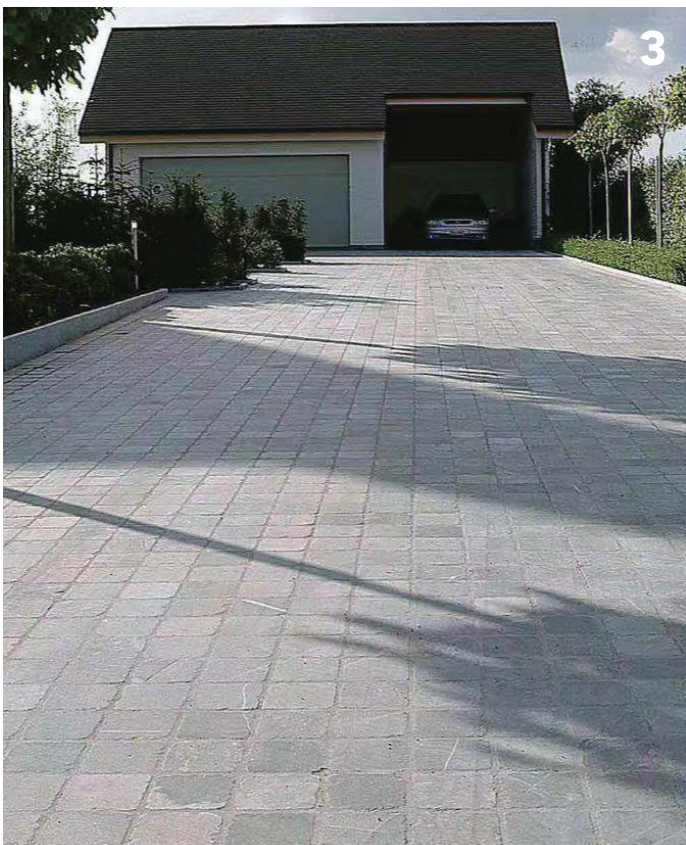

3



4

1 Outdoor Paving
3 Driveway, cobbles

2 Swimming Pool Paving and Coping
4 Steps, Stair Tread

Finish

Sawn	Honed	Flamed	Sandblasted	Rockface/ Natural Split	Tumbled and Unfilled	Honed and Filled	Acid Wash & Tumbled
P5 <input type="checkbox"/>	P3 <input checked="" type="checkbox"/>	P5 <input type="checkbox"/>	P5 <input checked="" type="checkbox"/>	P5 <input type="checkbox"/>	P5 <input type="checkbox"/>	P3 <input type="checkbox"/>	P5 <input type="checkbox"/>

- ☒ Standard Stock
☒ Made to Order
☐ Not Available

Format

- ☒ Paving ☒ Coping ☒ Stepper ☒ Cobble ☒ Slab

Slip Rating

P1 - Very low slip resistance

P2 - Low slip resistance

P3 - Moderate slip resistance

P4 - Good slip resistance

P5 - Very high slip resistance

Application

- ☒ Exterior Paving and Pathway ☒ Pool Surrounds ☒ Driveway
☒ Light Traffic ☒ Regular Traffic ☒ Commercial Area
☒ Interior Walling ☒ Exterior Walling ☒ Feature Walls

Sealing Requirement

- ☐ Optional ☐ Recommended ☒ Required

Stone Properties

Slip Resistance	Salt Resistance	Abrasion	Strength	Water Absorption	Comprehensive Strength	Flexural Strength	Light Reflectance Value (LRV)
AS 4586	AS/NZS 4456.10						
P5	Exposure Grade						

Type and Size (mm)

Finish	Paver	Coping	Stepper	Cobbles	Walling	Slab
Sandblasted	600x400x20	600x400x20 drop 60 600x400x30 bevelled	Made to order	Made to order	Made to order	1000-1600x600x30 1200x800x30 (Other side Honed)
Tumbled & Sandblasted	Made to order	Made to order	Made to order	100x100x20	Made to order	Made to order

Daily Maintenance

- Sweep or blow off leaves, dust, and sand regularly to avoid surface abrasion.
- Rinse with a hose occasionally, especially in dusty or muddy areas.
- Avoid placing metal furniture directly on the surface to prevent rust stains.
- For outdoor kitchens or BBQ areas, wipe up oil and food spills promptly to avoid staining.

Sealing

- Limestone is highly porous, and the sandblasted finish increases absorption.
- Seal before or immediately after installation to prevent early staining.
- Reseal every 6–12 months, depending on exposure to sun, rain, foot traffic, and surrounding vegetation.
- Use a penetrating (impregnating) sealer that:
 - Is breathable (prevents moisture from being trapped),
 - Offers UV protection,
 - Is suitable for limestone and exterior use.
- Optionally, a color-enhancing sealer can bring out natural tones, but test first on a hidden section.

Cleaning

- Use a pH-neutral stone cleaner or mild detergent mixed with water.
- Do NOT use acidic cleaners like vinegar, lemon, or bleach – they will etch the stone.
- Soft scrubbing with a brush is fine for textured surfaces to remove dirt from grooves.
- Pressure wash only at low pressure, keeping the nozzle at a distance to avoid surface erosion.
- For stains:
 - Use a poultice for oil or rust stains (specific to limestone).
 - For algae, moss, or mildew, use a stone-safe outdoor biocide (avoid chlorine bleach).

SAI Stone offers a wide range of cleaning and sealing products, as well as glue and grouting solutions. If you need more information or assistance, don't hesitate to reach out!

Contact Us

5 Hamilton Street
VIC 3166
Australia

1300 855 851
info@saistone.com.au
saistone.com.au

