




Sandblasted and Tumbled

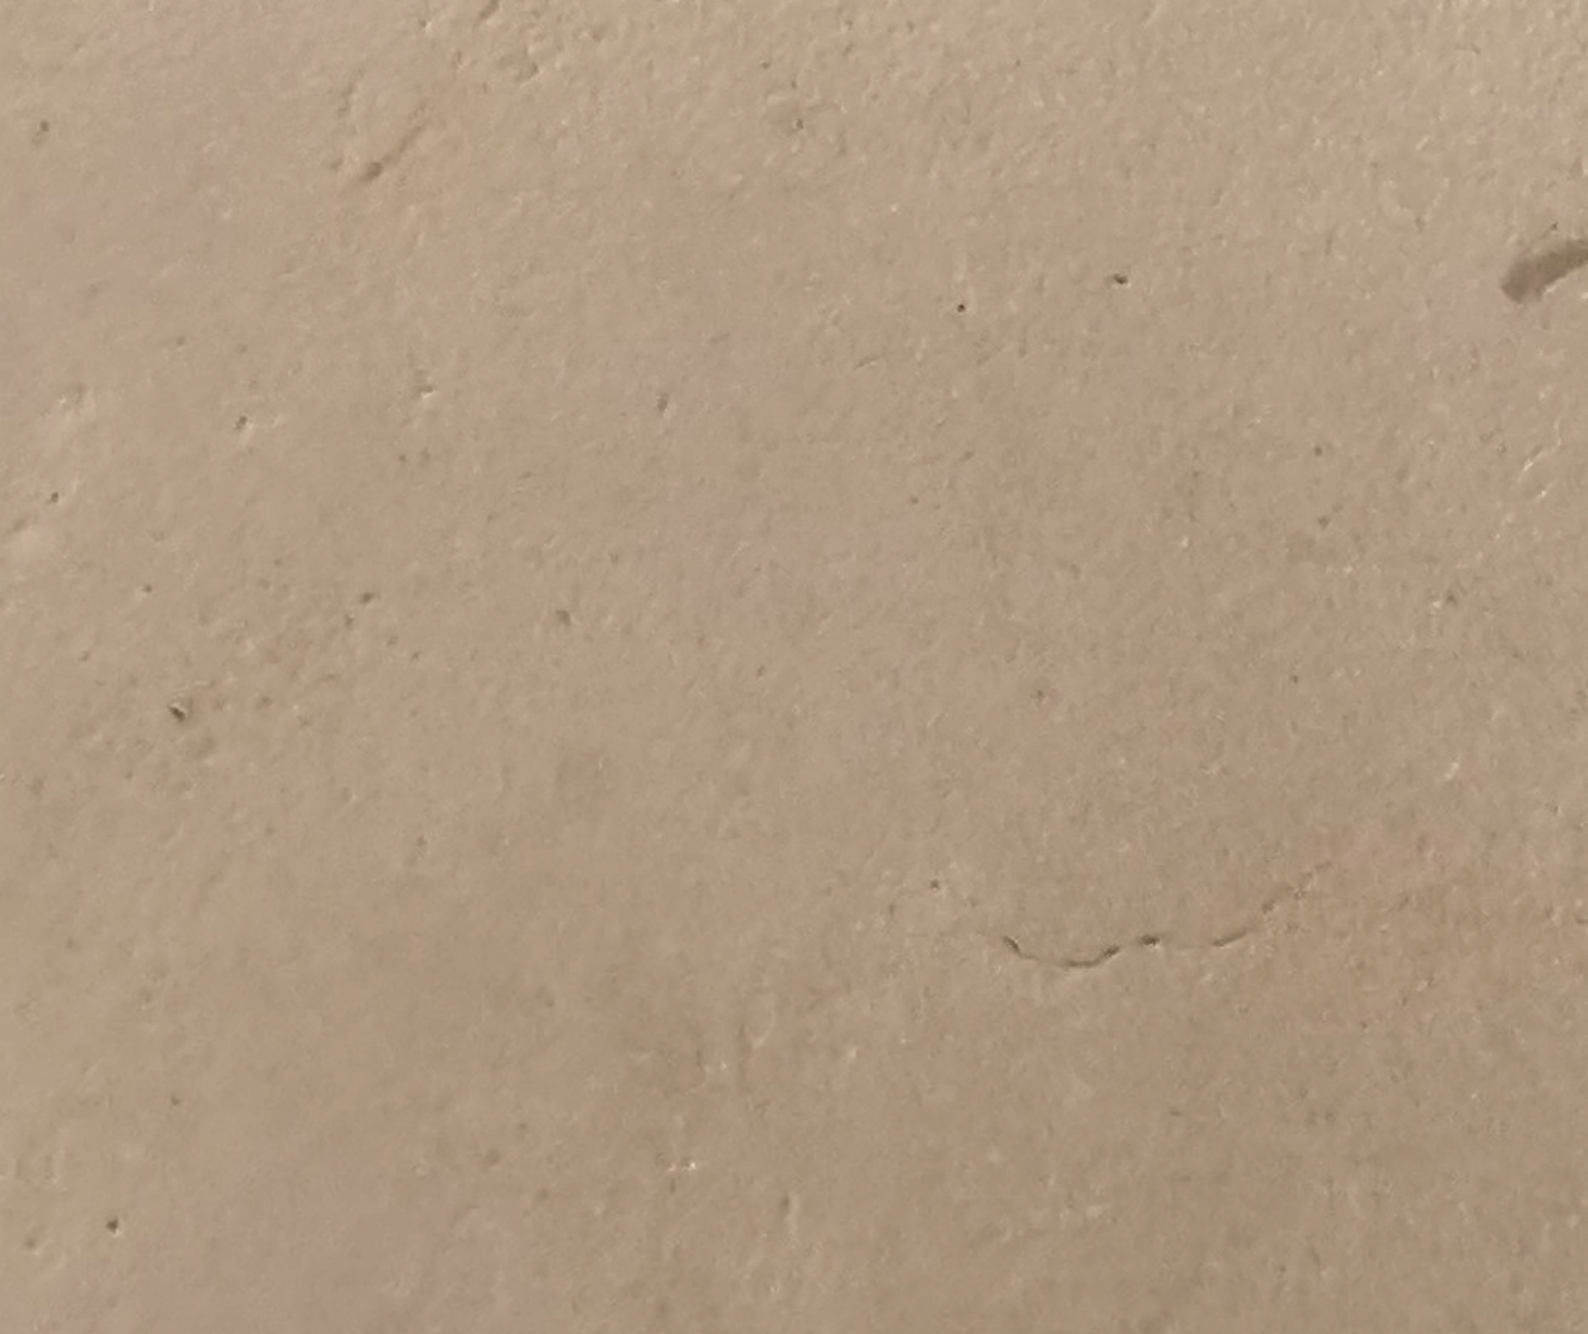

Honed and Tumbled

Smooth Beige

Marble



Finish

Sawn	Honed and Tumbled	Flamed	Sandblasted & Tumbled	Rockface	Natural Split	Honed and Filled	Acid Wash & Tumbled
P5	P3	P5	P5	P5	P5	P3	P5
☐	☒	☐	☒	☐	☐	☐	☐

- ☒ Standard Stock
- ☒ Made to Order
- ☐ Not Available

Format

- ☒ Paving
- ☒ Coping
- ☐ Stepper
- ☒ Cobble
- ☒ Slab

Slip Rating
P1 - Very low slip resistance
P2 - Low slip resistance
P3 - Moderate slip resistance
P4 - Good slip resistance
P5 - Very high slip resistance

Application

- ☒ Exterior Paving and Pathway
- ☒ Pool Surrounds
- ☒ Driveway
- ☒ Light Trafficce
- ☒ Regular Trafficce
- ☒ Commercial Area
- ☒ Interior Walling
- ☒ Exterior Walling
- ☒ Feature Walls

Sealing Requirement

- ☐ Optional
- ☐ Recommended
- ☒ Required

Stone Properties

Slip Resistance	Salt Resistance	Abrasion	Strength	Water Absorption	Comprehensive Strength	Flexural Strength	Light Reflectance Value (LRV)
-----------------	-----------------	----------	----------	------------------	------------------------	-------------------	-------------------------------

P4-P5

Exposure Grade

Type and Size (mm)

Finish	Paver	Coping	Stepper	Cobbles	Walling	Slab
All Finish	MTO	MTO		MTO	MTO	MTO



Daily Maintenance

- Dust or sweep regularly to prevent dirt and grit from scratching the surface.
- Wipe spills immediately, especially acidic substances (e.g., lemon juice, vinegar, wine, coffee).
- Use a soft cloth or microfiber mop for dry cleaning and dusting.
- Use coasters and mats under glasses, bottles, and hot dishes.

Sealing

Marble is porous, so sealing is essential to protect from stains.

- Initial sealing should be done during or just after installation.
- Reseal frequency:
 - Every 6–12 months for kitchen countertops or high-traffic areas.
 - Annually or bi-annually for flooring, depending on use and product type.
- Test with water: if water darkens the marble, it's time to reseal.
- Use a penetrating (impregnating) sealer made for natural stone.

Cleaning

- Use a pH-neutral stone cleaner or a mild dish soap diluted with water.
- Avoid:
 - Acidic or alkaline cleaners (e.g., vinegar, bleach, ammonia).
 - Abrasive pads, scouring powders, or rough cloths.
- For tougher stains:
 - Use a poultice paste specifically designed for marble.
 - Consult a stone care professional for deep etching or staining.
- Dry surfaces after cleaning to prevent water spots.

SAI Stone offers a wide range of cleaning and sealing products, as well as glue and grouting solutions. If you need more information or assistance, don't hesitate to reach out!

Contact Us

5 Hamilton Street
VIC 3166
Australia

1300 855 851
info@saistone.com.au
saistone.com.au

